


24V d.c., 16-way Input Module

Part Number 9730-4012

Features

- 16-way Input (2 groups of eight)
- Normal or Inverse logic
- LED Input state indication
- Optical isolation
- Pluggable connections
- Communications and module status indication
- Single/Dual CAN network connections
- Supports all baud rates (1M to 10k)
- Din-rail mounting

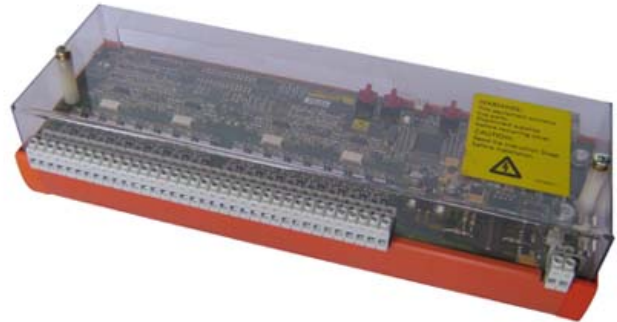

The 24 volt d.c. Normal/Inverse logic input module for the GEM80-500 range of Programmable Logic Controllers provides 16 input points in two groups of eight and is part of the GEMTEQ I/O range of products.

Contents

This box contains 9730-4012, 24V d.c., 16-way Input Module, Dual CAN including shroud.

Related Documents

Information describing the specification of this product and the requirements for its installation, operation and maintenance are contained in the GEMTEQ I/O Technical Manual, publication T2031En.

Warning: Failure to comply with any of the general requirements for installation, operation and maintenance provided in the technical manuals and/or the additional instructions given overleaf will significantly increase the risk of maloperation, fire or electric shock.

1. Hazardous Voltages

Hazardous voltages and energy levels can exist on plant wiring to the module. Ensure that both power and plant supplies are disconnected before fitting, removing or wiring to plant connectors. Also ensure that any shrouds or covers provided are securely replaced.

2. Plant Wiring

Due to the high concentration of plant wiring and terminations that may occur in a typical GEM80-500 system, All terminations to screw terminals should be terminated using bootlace ferrules.

All plant wiring must be suitably supported and restrained.

All plant wiring must be routed and segregated from other wiring categories as detailed in the appropriate Technical Manuals.

24V d.c., 16-way Input Module

Specifications

Environment

Humidity :	5% to 95% Relative Humidity, non condensing
Temperature :	Operating 0°C to 50°C
	Storage -20°C to 70°C
Atmospheric contamination :	The module must be totally protected from potentially corrosive atmospheres e.g. benzene, acid fumes, sulphur dioxide, hydrogen sulphide and nitrous oxide.


Electrical Specification

Module Supply	24 volts d.c. nominal, 225mA (max)
Module Supply Voltage Range	±10%, 21.6 to 26.4 V d.c.
Module Supply Fuse	2.5A 20x5mm Time Delay
Rated Voltage	24 volts d.c.
Input Characteristics	
On-state Voltage	20 to 30 volts d.c.
Off-state Voltage	0 to 5 volts d.c.
On-state Current	7mA typical
Off-state Current	0.7mA maximum
On response Time	5mS
Off response Time	7mS
Power Dissipation all inputs ON	8W max
Isolation	2500V between field side and logic side 1000V between CAN network and logic side

Mechanical Specification

Dimensions & Weight

Length	286 mm
Width	113 mm
Height	72 mm
Weight	0.7kg

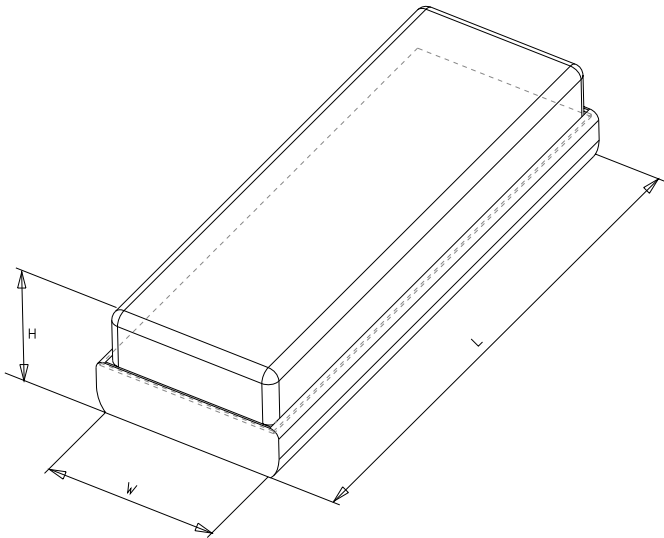

Product Compliance

Standard

This product complies with the essential safety requirements of the Low Voltage Directive (1), and the Electromagnetic Compatibility Directive (2). However, it is outside the scope of the Electromagnetic Directive, and the CE Marking and Declaration of Conformity requirements of the Directives apply only to the Low Voltage Directive.

(1) Low Voltage Directive 2006/95/EC

(2) Electromagnetic Compatibility Directive 2004/108/EC

EMC Emissions

EN55011

Conducted and Radiated
"Industrial Scientific & Medical Equipment
(Group 1, Class A)

EMC Immunity

EN61000-4-2

Electrostatic Discharge
8KV Air, 4KV Contact

IEC61000-4-3

RF Susceptibility
10V / m

EN61000-4-4

Fast Transient Burst
2KV

IEC61000-4-5

Surge Withstand
a.c. supply 1KV line to line
2KV line to earth
d.c. supply 0.5KV line to line
0.5KV line to earth
I/O 1KV line to earth

IEC61000-4-6


Conducted RF
10V

24V d.c., 16-way Input Module


Module Installation

The GEMTEQ I/O modules are designed to be mounted on a single section of 7.5mm x 35mm DIN-rail, in either a horizontal or vertical orientation.


Horizontal Mounting



Vertical Mounting



The modules should be mounted with adequate space for ventilation. The minimum spacing to adjacent equipment should be:

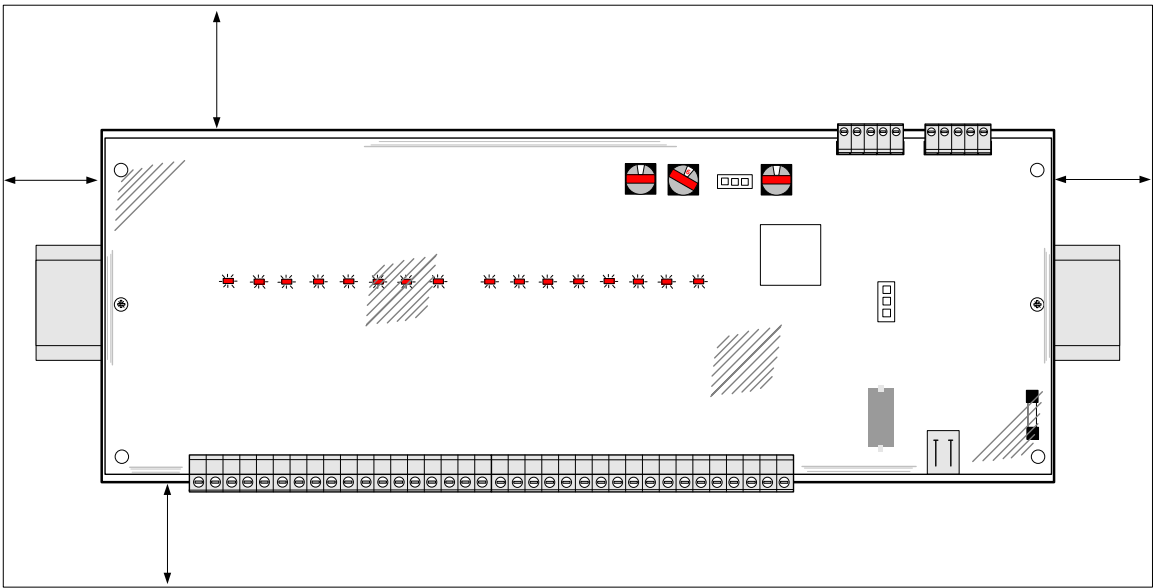

24V d.c., 16-way Input Module

Module Configuration Information


For the I/O module to be active on the GEMCAN network, the Baud Rate must be set the same as all other devices upon the network and a unique Node ID configured.

Warning:

Before removing the shroud to set the Node ID and Baud Rate switches, all power should be removed from the module by un-plugging the Power Supply (PL7) and Plant I/O Connections (PL6).

The shroud should be replaced before any power is re-applied to the module.

9730-4012 24V d.c., 16-way Input Module

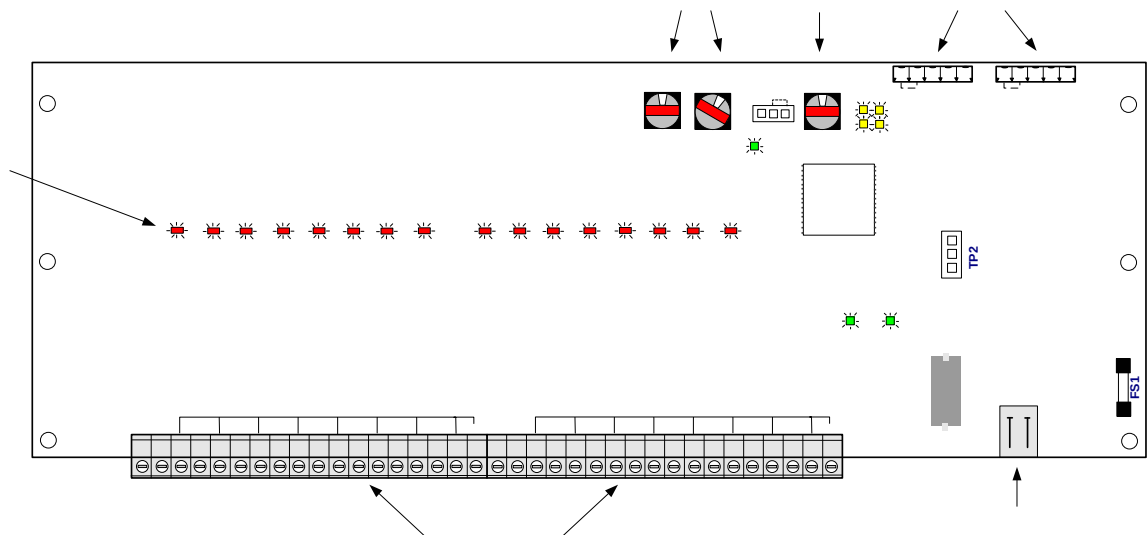


24V d.c., 16-way Input Module

CAN Baud Rate

This is setup on the hexadecimal switch SW5.

SW5	Baud Rate
0	1M baud
1	800k baud
2	500k baud
3	250k baud
4	125k baud
5	100k baud
6	50k baud
7	20k baud
8	10k baud
9-F	Not used



CAN Node ID

This is setup on the hexadecimal switches SW3 and SW4.

SW3 / SW4 Switch Position	Value
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
A	10
B	11
C	12
D	13
E	14
F	15

Node ID = (SW3 *16) + SW4

e.g.

SW3 = 0, SW4 = A Node ID = 10

SW3 = 1, SW4 = 6 Node ID = (1*16) + 6 = 22

SW3 = 7, SW4 = D Node ID = (7*16) + 13 = 125


Field Wiring Information

Three types of field wiring need to be made to the GEMTEQ I/O module; CAN 'A' and/or 'B' connections, power supply and plant I/O connections.


Good wiring practices, including segregation and earthing, should be adopted to ensure reliable system operation. Suitable strain relief should be provided for all field wiring.

CAN Network Connections

In line connection

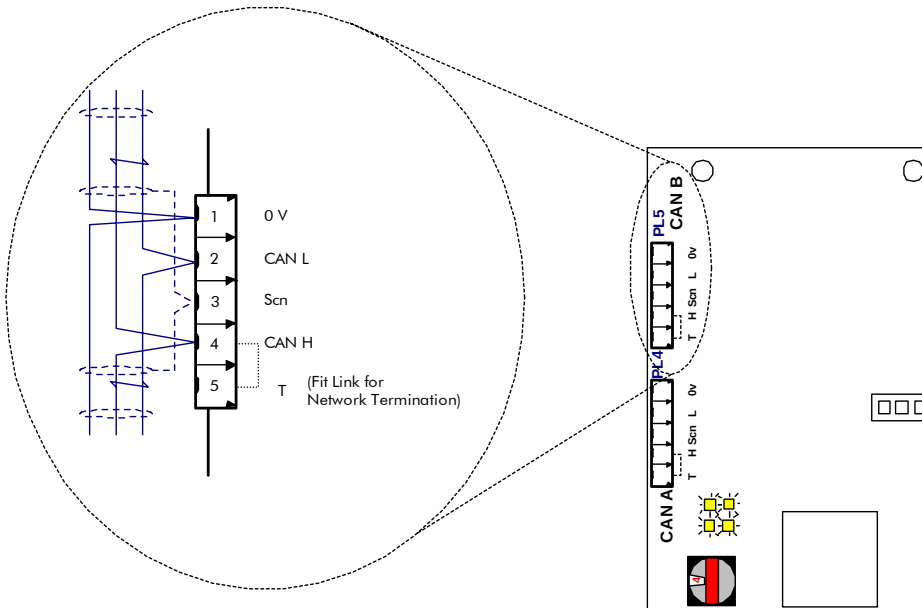

End of line connection

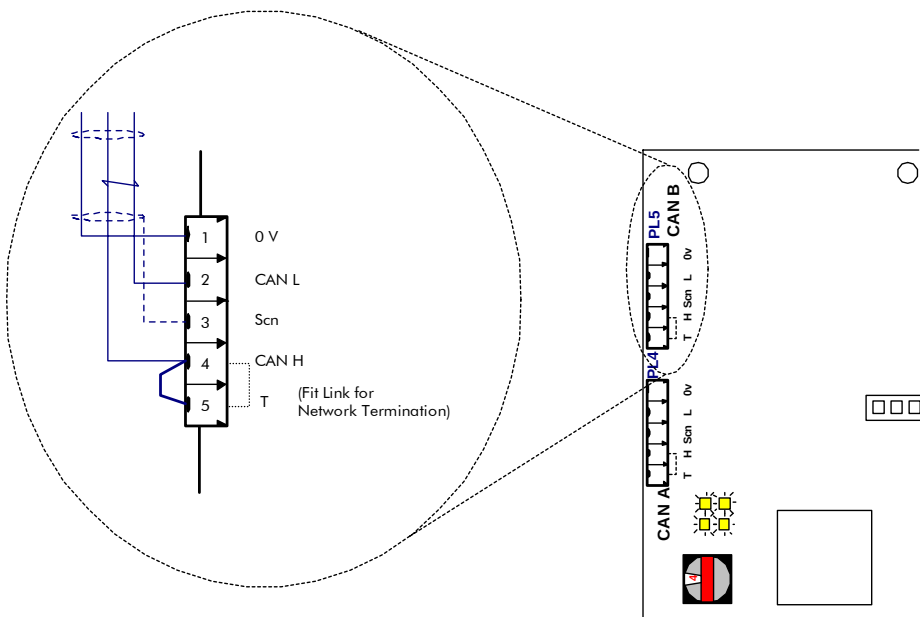

24V d.c., 16-way Input Module


CAN cable has a single twisted pair with an overall screen. CAN has a specified colour code and it is strongly recommended that this code is used. For further information on cabling CAN networks, please refer to the CAN in Automation web site www.can-cia.de.

Cable	Data signal	Terminal	Description
Drain Wire	0V	1	Zero volts
Blue	CAN-L	2	CAN-Low data line
Braided Shield	Screen	3	Cable Screen
White	CAN-H	4	CAN-High data line
	T	5	Termination Resistor when linked to 4.

Note: Please refer to the GEMTEQ I/O Technical Manual (T2031En) for full details of the CAN network wiring, including the earth requirements.


Power Supply Connections

Module power supply connections should be made as follows:-




Plant I/O Connections

Normal Input

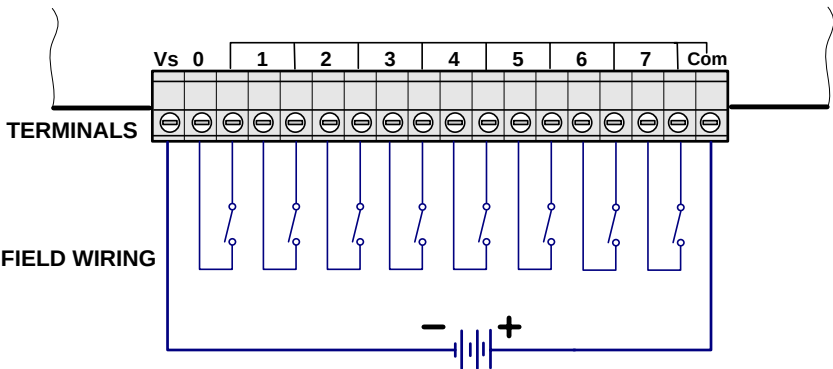

Inverse Input

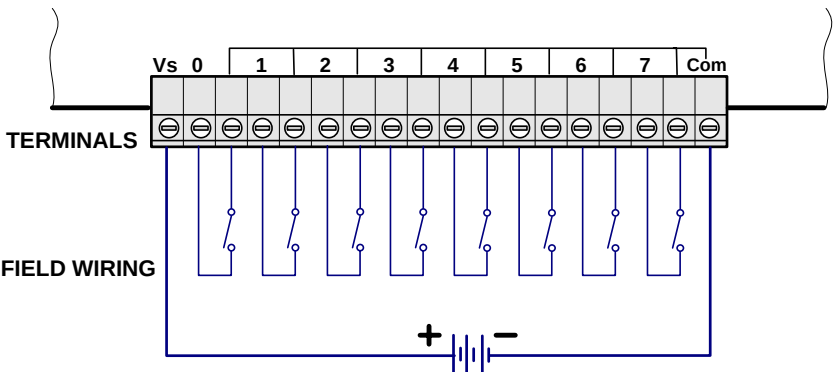

CAN Network Data

The GEMTEQ I/O module transmits data to and receives data from the CAN network via Process Data Objects (PDOs).

Each GEMTEQ I/O module occupies 16 C/D tables.

The table below shows which C/D tables are used by this module and the function they perform.

Data Transmitted to the CAN Network by the 9730-4012 I/O Module

TxPDO	Host Controller C-Table Data	Description
0	Cx+0	Digital Input Data
	Cx+1	
	Cx+2	
	Cx+3	
1	Cx+4	
	Cx+5	
	Cx+6	
	Cx+7	
2	Cx+8	
	Cx+9	
	Cx+10	
	Cx+11	
3	Cx+12	
	Cx+13	
	Cx+14	
	Cx+15	

Cx

This is determined by :-
(Node ID -1) * 16

Data Received from the CAN Network by the 9730-4012 I/O Module

RxPDO	Host Controller D-Table Data	Description
0	Dx+0	
	Dx+1	
	Dx+2	
	Dx+3	
1	Dx+4	
	Dx+5	
	Dx+6	
	Dx+7	
2	Dx+8	
	Dx+9	
	Dx+10	
	Dx+11	Input Filter Time (mS)
3	Dx+12	Minimum PDO Silence Time (mS) 0 = 20 mS (Default)
	Dx+13	
	Dx+14	
	Dx+15	

Dx

This is determined by :-
(Node ID -1) * 16

24V d.c., 16-way Input Module

Module Replacement Guidelines

Should the I/O module require replacement for any reason:-

- 1 Ensure that the host PLC and plant are placed in a safe condition, in accordance with local operating procedures.
- 2 Remove all power from the I/O module.
- 3 Disconnect Module Supply, CAN Connections and Plant I/O Connections from the module.
- 4 Ensure that the replacement module has correct Node ID and Baud Rate switch settings.
(**Warning:-** Make certain the shroud is re-fitted correctly)
- 5 Mount the replacement I/O module, re-connect all connections and apply power.
- 6 Monitor host PLC Module Presence and Fault Indications to ensure correct operation.

Note: Please refer to the GEMTEQ I/O Technical Manual (T2031En) for full details of the diagnostics available.

Order Codes

9730-4012 24V d.c., 16-way Input Module, dual CAN including shroud

Customer Support and Training

Please refer to your local technical support centre if you have any queries about this product. Contact telephone numbers are shown below.

Visit: www.gem80.com

France

Converteam SAS
1, Square John H. Patterson
91345 Massy Cedex - France
Tel : +33 (0)1 77 31 20 00
Fax : +33 (0)1 60 19 64 95

Germany

Converteam GmbH
Culemeyerstraße 1,
12277 Berlin - Germany
Tel : +49 (0) 30 7622 – 0
Fax : +49 (0) 30 7622 2109

UK

Converteam UK Ltd
West Avenue, Kidsgrove
Stoke-on-Trent, ST7 1TW – UK
Tel : +44 (0) 1782 781000
Fax : +44 (0) 1782 781001

USA

Converteam Inc.
610 Epsilon Drive
Pittsburgh, PA 15238 - USA
Tel : +1 412 967 0765
Fax : +1 412 967 7660

CONVERTEAM
THE POWER CONVERSION COMPANY